

UV500-Compact

Online Water Analyser



Specialist Of UV Spectroscopy

> UV500-Compact Online Water Analyser

The UV500-Compact is a cost effective and compact on-line water analyser based on a high resolution UV-visible spectrograph.

It allows to monitor simultaneously many different parameters for waste water treatment plants or river monitoring stations with an excellent stability and low operating cost.

The same spectrograph can measure organic matter, nitrate, colour, turbidity, chromium and phosphate. A complementary UV-visible fluorescence module allows the measurement of aromatics hydrocarbons (PAH). Nephelometric turbidity by visible or infra-red laser diode is also available. A colorimetric module allows the measurement of Phosphate and Chromium.


The full UV-visible spectrum can also be used to monitor specific chemical process making the UV500-Compact a ideal instrument for chemical plants. Different materials are available for the flow cell and hydraulic parts depending on the matrix chemical compatibility.

External probes can be added for physicochemical parameters like pH, ORP, dissolved oxygen, conductivity, Total Suspended Solids, Chlorine, TDS and turbidity.

Thanks to its automatic cleaning system and its extremely long life time lamp, the maintenance is roughly limited to the periodic refill of the inexpensive cleaning solution and eventually reagents depending on the parameters.




- A 2048 pixels high resolution spectrograph scanning wavelengths from 180 nm to 750 nm is the master part of the UV500. Direct absorbance measurement for UV254, COD, BOD, TOC, NO₃, Colour PO₄ and Cr VI brings fast and stable measurements with a simple hydraulic circuit. Factory predefined or local multi-point calibration allows to get readings of COD, BOD and TOC under the UV alternative method for compatible applications. UV spectroscopy brings faster results than conventional methods like COD, BOD, TOC with much less maintenance once the correlation is determined.
- The patented flow cell allows very high level of suspended solid without clogging. The turbidity is automatically compensated by a dual-wavelength method.
- The UV source is a xenon flash lamp specified for 10⁹ flashes that corresponds to more than 10 years of life time with one measurement every minute.
- Physico-chemical measurements like pH, ORP, dissolved oxygen, conductivity, Total Suspended Solids, TDS, Chlorine, Turbidity can be added to the internal measurements by using external probes. The dissolved oxygen probe is based on fluorescence method for a lower maintenance and higher stability.



Measuring principle by absorbance

1: spectrograph,
2: beam splitter,
3: patented water flow cell,
4: xenon lamps.

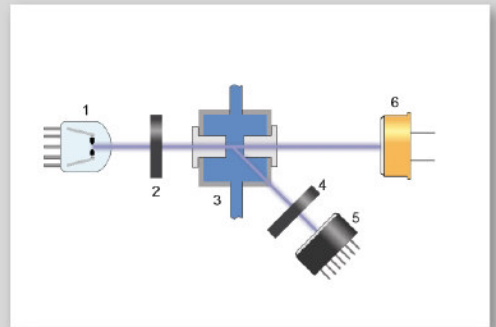


UV fluorescence principle


1: Xenon lamp,
2: excitation filter,
3: flow cell,
4: emission filter,
5: photomultiplier,
6: reference photo detector.

Robust Industrial Probes


All the probes are specially designed for harsh environments with high level of suspended solid.



Turbidity Probe Low Range




TSS Probe Medium Range

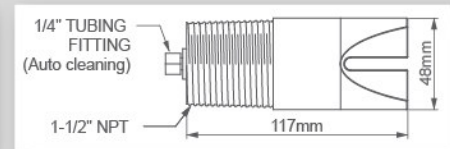


TSS Probe High Range



pH Probe

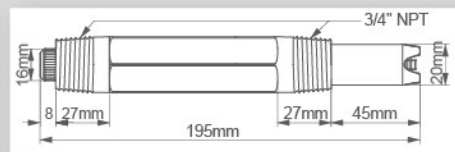

Conductivity Probe

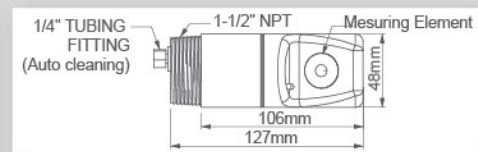

Dissolved Oxygen Probe

Probes and dimensions are only for illustrations

Communication

The RS232 port supports the MODBUS protocol to transmit each measuring channel value to a SCADA system

Additional parameters are available like status code, error code, calibration values and pumps run time.

Basic 4-20 mA output modules can be plugged on the main board for each measuring channel, in the limit of 12 modules. A USB port enables to download on any USB key the last 5000 recorded measurements as well as a diagnostic file containing the configuration and useful information for remote troubleshooting.

The recorded measurements file can be imported to Excel for graphs or other treatments.


The software of the analyser can be upgraded by connecting a USB key.



When different streams need to be analysed, for example inlet and outlet of a plant, an optional multiplexing system delivers relay contacts to control external electric-valves or external pumps.

Up to 6 different streams can be selected

The measuring channels can be either duplicated (each one having its own 4-20mA output or MODBUS register), or measured sequentially to fit with the maximum of 16 measuring channels (a MODBUS register tells which stream is currently being measured).

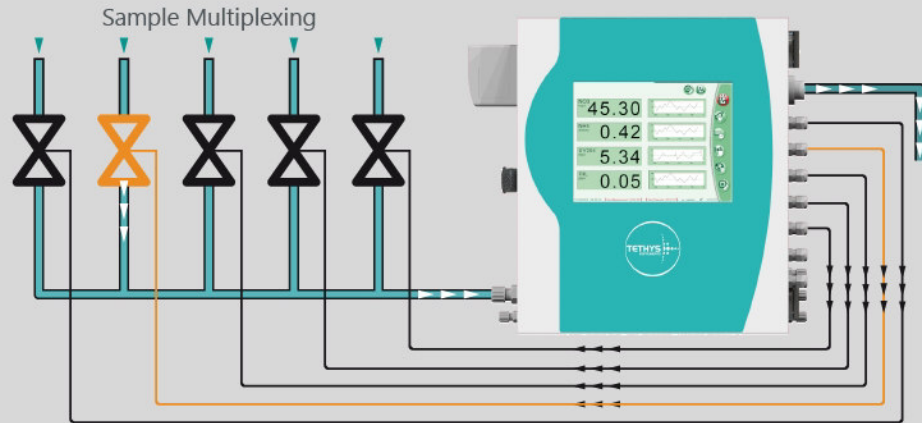


User-Friendly Interface

The colour touch screen and intuitive interface available in 9 different languages (Chinese, English, French, German, Hungarian, Italian, Portuguese, Spanish, Turkish) makes very easy to test or configure the analyser.

Many test functions allows to test and troubleshoot each element of the analysers (light signal, pumps, solenoid valves, etc...) to setup quickly a maintenance diagnostic.

An acid resistant protection film on the screen assures an efficient long term protection.

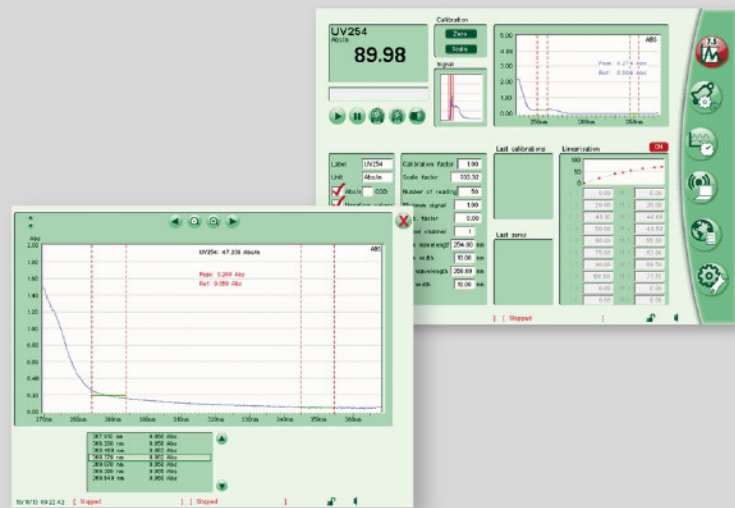

Sampling System


The UV500 Compact

can adapt to many different kind of sampling depending of the application : surface water, drinking water, process water or wastewater.


If the water is already pressurized, the sample can be admitted directly inside the analyser with a maximal pressure of 4 bars. Otherwise an optional built-in peristaltic pump, synchronised with the measurement to extend the tubing life time, allows to take the sample directly from a tank located up to 6 meters below the analyser.

For demanding applications with long distances, another peristaltic pump in a separate enclosure is proposed as an option.

For some applications on river water or wastewater where two sampling pumps are necessary, the UV500-Compact delivers a relay contact to synchronise the primary pump. The delay and running time of each pump can be adjusted easily in the parameters menu of the analyser.

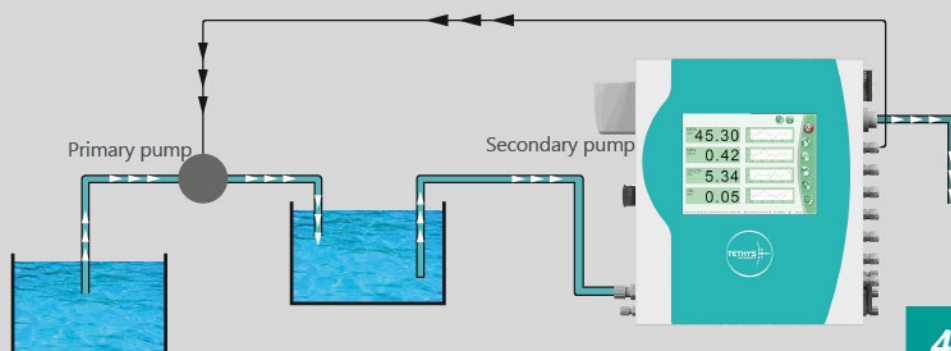

> UV500-Compact Parameters Specifications

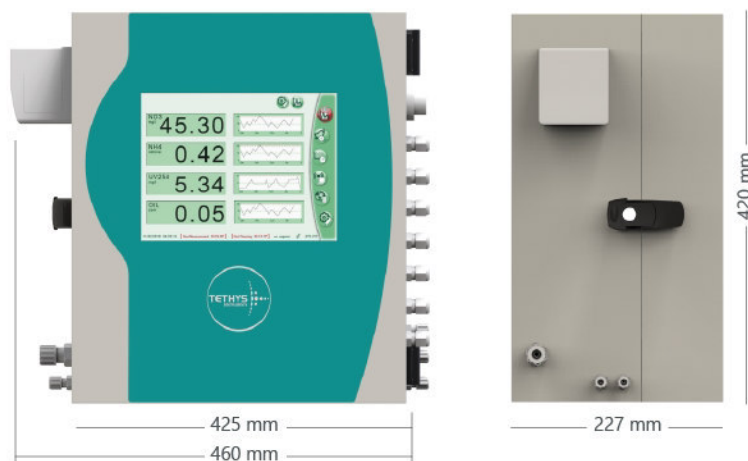

Parameter	Standard range Other ranges on request	Typical Repeatability for low values <10% FS	Accuracy On standard solution
UV254	0-200 Abs/m 0-600 Abs/m 0-2000 Abs/m	+/- 0.05 Abs/m +/- 0.15 Abs/m +/- 0.5 Abs/m	+/- 2%
COD by UV correlation	0-100 mg/l COD 0-2000 mg/l COD 0-20000 mg/l COD	+/- 0.05 mg/l COD +/- 1 mg/l COD +/- 10 mg/l COD	+/- 2%
BOD by UV correlation	0-100 mg/l BOD 0-1000 mg/l BOD 0-10000 mg/l BOD	+/- 0.05 mg/l BOD +/- 0.5 mg/l BOD +/- 5 mg/l BOD	+/- 2%
TOC by UV correlation	0-100 mg/l TOC 0-1000 mg/l TOC 0-10000 mg/l TOC	+/- 0.05 mg/l TOC +/- 0.5 mg/l TOC +/- 5 mg/l TOC	+/- 2%
Nitrate	0-100 mg/l NO ₃	+/- 0.1 mg/l NO ₃	+/- 2%
Colour	0-100 pt/Co 0-1000 pt/Co	+/- 0.2 Pt-Co +/- 2 Pt-Co	+/- 2%
PAH (aromatics)	0-10 mg/l C ₆ H ₆	+/- 0.01 mg/l C ₆ H ₆	+/- 2%
Oil in water	0-100 ppm OIW 0-1000 ppm OIW	+/- 0.1 ppm OIW +/- 1 ppm OIW	+/- 2%
Phosphate	0-2 mg/l P-PO ₄ 0-20 mg/l P-PO ₄	+/- 0.01 mg/l P-PO ₄ +/- 0.1 mg/l P-PO ₄	+/- 2%
Chromium VI	0-2 mg/l Cr VI	+/- 0.04 mg/l Cr VI	+/- 2%
Turbidity (TSS by correlation)	0-10 NTU 0-100 NTU 0-1000 NTU	+/- 0.01 NTU +/- 0.1 NTU +/- 1 NTU	+/- 2%
pH	0-14	+/- 0.01 pH	+/- 2%
ORP	+/- 2000 mV	+/- 1 mV	+/- 2%
Dissolved oxygen	0-25 mg/l O ₂	+/- 0.1 mg/l O ₂	+/- 2%
Conductivity	0-2000 µS	+/- 1 µS	+/- 2%
External turbidity (TSS by correlation)	0-4 NTU 0-40 NTU 0-400 NTU		+/- 2% +/- 2% +/- 2%
External TSS	0-1500 mg/l TSS 0-30000 mg/l TSS	+/- 1% of reading or +/- 2 mg/l TSS +/- 1% of reading or +/- 2 mg/l TSS	
Temperature	0-80°C	+/- 0.1 °C	+/- 2%

> UV500-Compact General Specifications

Sample flow	Recommended: 0 - 5 l/min
Sample pressure	0 - 4 Bar (0 - 1 Bar with sampling peristaltic pump)
Sample temperature	0 - 80 °C
Wet parts materials	Quartz, Polypropylene, Polyethylene, FPM (viton), PMMA
Measuring time	5 sec (except PO4 : 3 min)
Measurement interval	1 min to 720 min Physicochemical parameters may be continuous
Memory	5000 lines of measurements (up to 16 channels) with date and time
Consumption	Cleaning solution (5% sulfuric acid): 220 ml/day Reagent for PO4: 2 ml per measurement
Maintenance interval	Recommended: 6 months to 1 year (except for refilling)
Power supply	90 - 264 VAC 50/60 Hz 80 VA
Screen	Colour TFT LCD 640x480 pixels with LED backlight
Communication	RS232 with MODBUS protocol RS485 for external probes (DO, TSS) USB WI-FI (IEEE802.11B) optional Ethernet (IEEE802.3) optional
Certifications	CE, EN 61010-1, EN 61326
Enclosure	Stainless steel with epoxy coating, IP65, wall mounting brackets
Dimensions	425x420x227 mm
Weight	15 to 25 kg depending on the configuration

> UV500-Compact Parts references

Basic unit

UV500-C *(Compact)* **Basic unit (no measurement included)**
 Color graphic display 640x320 pixels with touch screen
 Built-in data logger, memory 5000 measurements for each parameter
 12 sockets for input and output modules (not included, refer to options)
 7 available glands for inputs / outputs
 RS232 included (Sub-D 9 ways female connector) with 2 meters cable for PC
 RS485 included for communication with MODBUS protocol
 USB port included for USB key connection
 Automatic cleaning system with 2-litres tank
 Power supply 90-260 VAC 47-63 Hz with power cord 2 meters
 Enclosure IP65/Nema4x stainless steel 316, (W x H x D) 420 x 425 x 227 mm / 15 to 25 kg
 Mounting lugs for wall

Sampling pump

P	Sampling peristaltic pump for unpressurized water <i>Built-in on the left side of the enclosure</i> <i>Flow of about 600 ml/min</i> <i>Discontinuous operating to increase tube lifetime</i>	P-EXT	External Peristaltic sampling pump for unpressurized water <i>Flow of about 940 ml/min</i> <i>Heavy duty brushless motor</i> <i>Discontinuous operating to increase tube lifetime</i>
----------	--	--------------	---

Spectrograph (required for UV254, COD, BOD, TOC, NO₃, Colour, PO₄ and Cr VI measurements)

SPECTRO500 UV-Visible spectrograph
 Range: 180 – 750 nm
 Resolution 0.29 nm
 2048 pixels

Absorbance flow cell and xenon lamp (required for UV254, COD, BOD, TOC, NO₃, Colour, PO₄, Cr VI measurements)

ABS500 Flow cell and xenon lamp for absorbance measurements
 Optical path: 1 or 3 or 10 mm
 Lamp lifetime: 1 E 9 flashes
 Wet materials: PMMA, Viton, Quartz

Configuration and calibration for measurements by absorbance (require SPECTRO500 and ABS500 modules)

COD-H-500	Organic matter high range <i>high range: 0 – 2,000 Abs/m</i> <i>(equivalent to approx. 20,000 mg/l COD on municipal waste water)</i>	NO3-500	Nitrate <i>Range: 0 – 100 mg/l NO₃ (0 – 25 mg/l N of NO₃)</i> <i>Measurement possible until 250 mg/l NO₃ (60 mg/l N-NO₃)</i>
COD-M-500	Organic matter Medium range <i>medium range: 0 – 600 Abs/m</i>	CO-H-500	Colour high range <i>Range: 0 – 1000 Pt-Co unit</i>
COD-L-500	Organic matter low range <i>low range: 0 – 200 Abs/m</i> <i>(equivalent to 100 mg/l COD on river water)</i>	CO-L-500	Colour low range <i>Range: 0 – 100 Pt-Co unit</i>

Measurement by UV fluorescence (required for PAH and OIW measurements)

PAH-500 **Poly-aromatic hydrocarbons**
 Range: 0 – 10 ppm phenol
 Range: 0 – 100 ppm OIW
 (equivalent to approx. 0 – 100 ppm oil with 10% aromatic ratio)

Measurement module by colorimetric method (require SPECTRO500 and ABS500 module)

PO4-H-500	Phosphate high range <i>High range: 0 – 20 mg/l P (60 mg/l PO₄)</i> <i>Sampling peristaltic pump included</i>	PO4-L-500	Phosphate low range <i>Low range: 0 – 2 mg/l P (6 mg/l PO₄)</i> <i>Sampling peristaltic pump included</i>
CR6-500	Hexavalent chromium (VI) <i>Range: 0 – 2 mg/l Cr VI</i> <i>Measurement possible until 5 mg/l Cr VI</i>		

Measurement by nephelometry

IRTURB-H-500	Internal turbidity sensor high range <i>High range: 0 – 1,000 NTU</i> <i>Nephelometric method by laser diode at 650 nm (850 nm on request)</i>	IRTURB-L-500	Internal turbidity sensor low range <i>Low range: 0 – 10 NTU</i> <i>Nephelometric method by laser diode at 650 nm (850 nm on request)</i>
IRTURB-M-500	Internal turbidity sensor medium range <i>Low range: 0 – 100 NTU</i> <i>Nephelometric method by laser diode at 650 nm (850 nm on request)</i>		

> UV500-Compact Parts references

Measurements by optical method

DO-F **Dissolved oxygen probe by fluorescence**
Range: 0 - 25 mg/l O₂
7 meters of cable

EXT-TURB-H **Turbidity probes high range**
High range: 0 - 30,000 mg/l TSS
7 meters cable

EXT-TURB-L **Turbidity probes low range**
Low range: 0 - 1500 mg/l TSS
7 meters cable

EXT-TURBNEPH-H **Nephelometric turbidity probes high range**
Range: 0 - 400 NTU
10 meters cable

EXT-TURBNEPH-M **Nephelometric turbidity probes medium range**
Range: 0 - 40 NTU
10 meters cable

EXT-TURBNEPH-L **Nephelometric turbidity probes low range**
Range: 0 - 4 NTU
10 meters cable

Measurements by electrode (external)

PH500 **pH/ORP module**
pH Range: 0 - 14
ATC input for platinum RTD 100 Ohm or 1000 Ohm
ORP Range: -2000 mV to +2000 mV

ELPH **pH on-line electrode**
Range: 0 - 14
5 meters of cable (10 meters in option)
Built-in ATC RTD 100 Ohm

ELORP **ORP on-line electrode**
Range: -2000 mV to +2000 mV
5 meters of cable (10 meters in option)
Built-in ATC RTD 100 Ohm

COND500 **Conductivity module**
Range: 0 - 100 μ S to 0 - 100 mS
ATC input for platinum RTD 100 Ohm

ELCOND **Conductivity on-line electrode**
Range: 0 - 10 mS
Cell constant $k=1.0 \text{ cm}^{-1}$ (medium range)
5 meters of cable (10 meters in option)
Built-in ATC RTD 100 Ohm

ICOND **Inductive conductivity online probe**
Range: 0 - 100 mS
3 meters of cable
Built-in temperature compensation at 2.2%/°C
Requires a IN4-20-500 module instead of COND500 module

Input modules

IN4-20-500 **4-20 mA input module**
Isolated 4-20 mA input
Impedance: 100 Ohm

LOGIC500 **Double logical inputs module**
Input no 1 : external pulse command for measurement
Input no 2 : measurements inhibition
Isolated 0 - 48 V DC inputs
Impedance: >10 Kohm

Output modules

OUT4-20-500 **4-20 mA output module**
Isolated 4-20 mA output
Active output, Max load 500 Ohm

RELAY500 **Relay module**
Contact rating: 2A/220V

Communications

WIFI500 **Wifi Interface**
Connection to wireless WIFI network
Secured data transfer (WEP keys)

ETHER500 **Ethernet interface**
Ethernet 10 base-T (IEEE 802.3)

Recommended consumables for 2 years :

P-ACI-HD1 : Head of cleaning pump (x1)
T-PHAR-1 : Tubing 6.4x9.6 mm (if optional sampling pump)
(x2 to x8 depending on sampling pump use)

Cleaning solution and reagents (if any) are not provided

The manufacturer reserves the right to modify and/or change any specifications, dimensions, design or drawing at any time without prior notice

TETHYS Instruments
57, Chemin du vieux Chêne, 38240 MEYLAN -France-
Tel : +33 4 76 41 86 39 - Fax : +33 4 76 41 92 27
Mail : sales@tethys-instruments.com
Web : www.tethys-instruments.com



Management System
ISO 9001:2008
www.tuv.com
ID 9105083475



IND#A - E.COM.20

